


Category

SP14 | Warm edge solution with wire

The spacer is suitable for all common frame sizes. Patented steel wire ensure high profile stability in the processing process. Low values and high productivity make it an ideal solution for standard insulating glass.

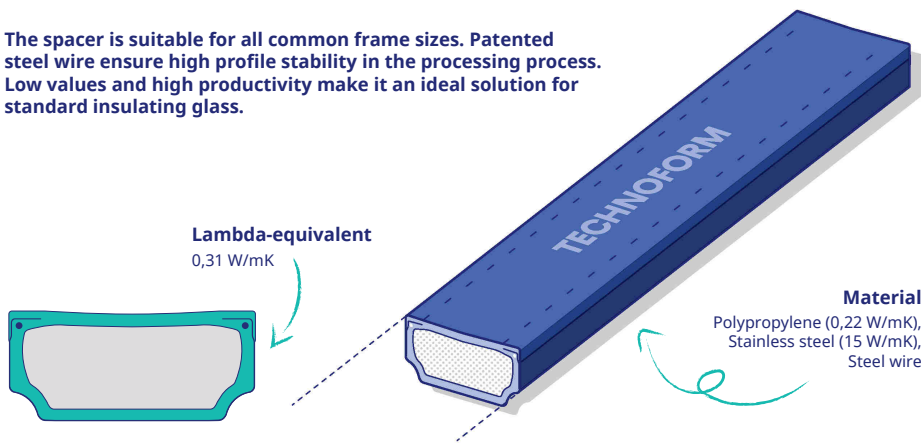

Accessory articles:

Steel straight connector: CN22 (Eduard Kronenberg), CN23 (Eduard Kronenberg)
Plastic straight connector: CN53 (Technoform), CN54 (Technoform)

Corner key: CN28 (Cera), CN59 (Schmitz)
Gas filling corner key: CN29 with hole (Cera), CN30 without hole (Cera)
Plugs long: CN32 (Cera)
Flexible corner key: CN72 (Cera)

6 TECHNOFORM

Standard applications

Standard colors



Custom colors



Certificates

- EN 1279 2, 3 & 6 appendix B
- EN 1279-4:2018, appendix C, H + ift- guideline VE-07/3 2018-01
- EN ISO 4892-2, DTA and ASTM
- DIN EN ISO 4892-2 DTA und ASTM E2190
- RAL Quality mark for insulating glass units
- Certified Passive House Component Class pHB for Cold Climate.

Widths

- 10 mm
- 12 mm
- 13 mm
- 14 mm
- 15 mm
- 16 mm
- 17 mm
- 18 mm
- 20 mm
- 22 mm
- 24 mm
- 26 mm
- 28 mm
- 30 mm
- 32 mm