


Category

SP16 | Solution for highest thermal requirements

This spacer impresses with its outstanding thermal performance, maximum profile rigidity and its high-quality surface.

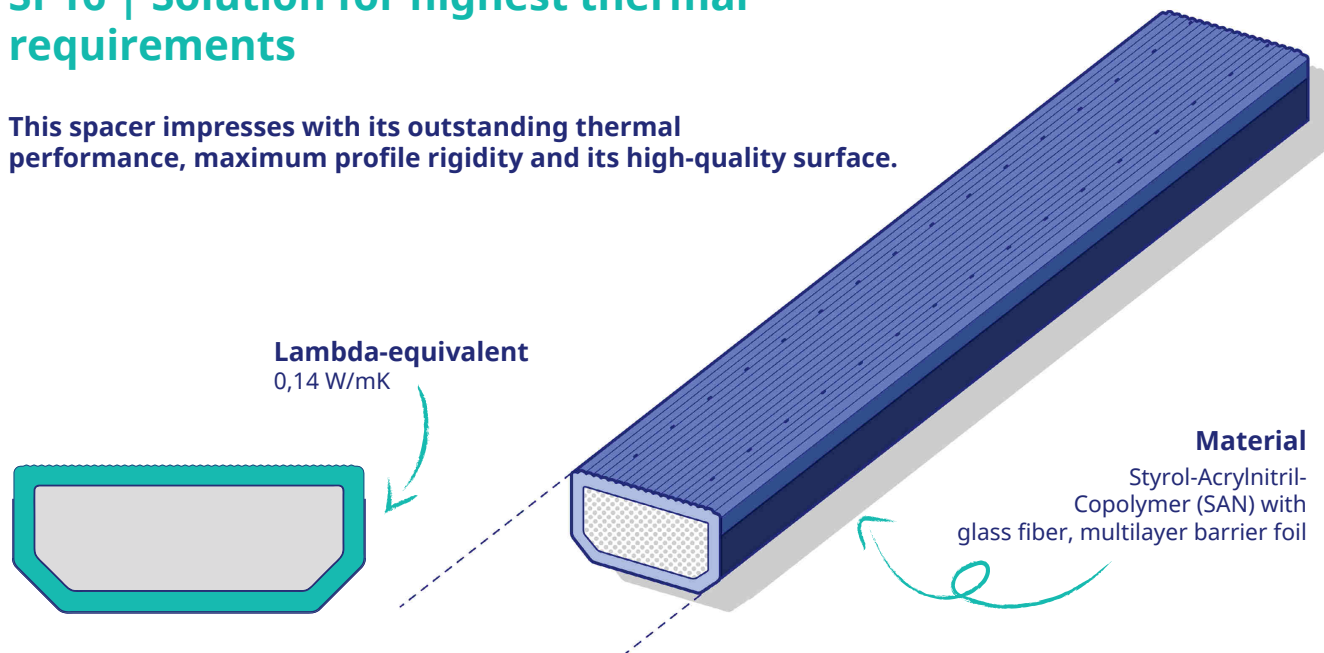

Lambda-equivalent
0,14 W/mK

Material

Styrol-Acrylnitril-Copolymer (SAN) with glass fiber, multilayer barrier foil

Accessory articles:

Plastic straight connector:	CN44 (Schmitz)
Corner key:	CN45 mit Butyl (S&T), CN46 (S&T)
Flexible Corner key:	CN47 (S&T)

Gas filling corner key:	CN49 without hole (S&T), CN48 with hole (S&T)
Gas filling plug:	CN50 (Cera)

Project applications

Standard colors



Custom colors



Widths

10 mm

12 mm

14 mm

15 mm

16 mm

18 mm

20 mm

22 mm

Certificates

- EN 1279 2, 3 & 6
- EN ISO 4892-2 DTA
- EN 1279-4:2018, appendix C, H + ift-guideline VE-07/3 2018-01
- RAL Quality mark for insulating glass units
- It is a certified Passive House Component-Class phA for Arctic Climate.